



CURVE CARATTERISTICHE - PERFORMANCES

Pompa tipo - Pump type

**B3XR-A 7,5kW**

COSTANTI DI PROVA - TEST CONSTANTS

n = 2900 1/min

t = 15°C

= 1000 kg/m<sup>3</sup>

∅ gir./impeller = 167,5 mm

h - pale/blades = 24 mm

n° pale/blades = 3

TABELLA N°

**A5000003**





13/06/2007 Rev-0

3" G - DN80

DN (aspirazione pompa - pump suction)

3" G - DN80

DN (mand. pompa - pump delivery)

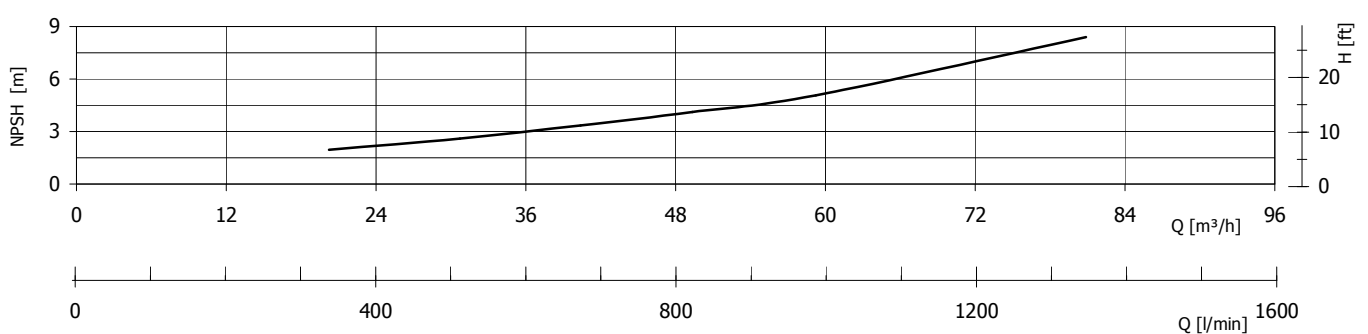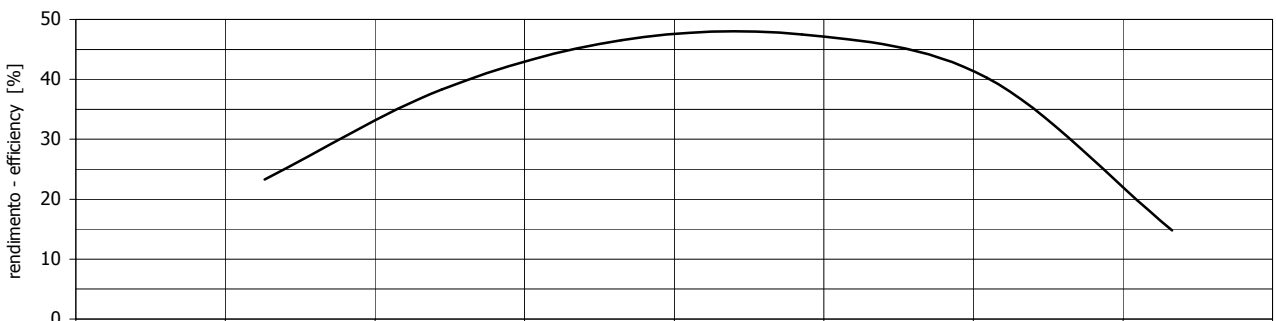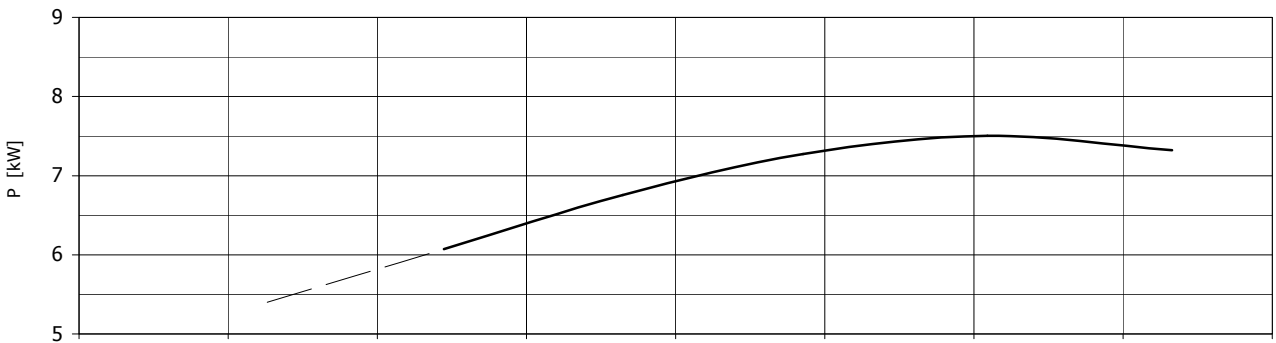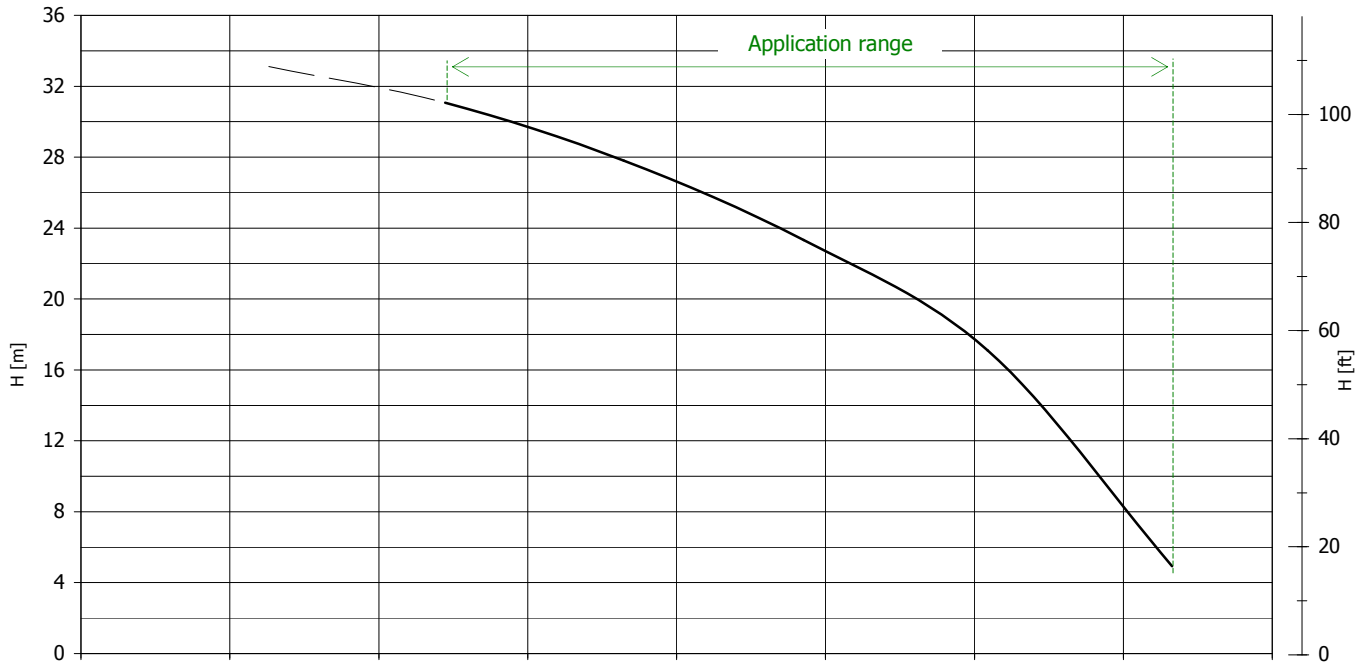

Le caratteristiche di funzionamento e di targhetta si intendono per servizio continuo ed acqua pulita, con altezza manometrica massima di aspirazione di 1 m c.a. Per altezze manometriche superiori e fino ad un massimo di 6 m c.a., le caratteristiche si riducono nei valori di portata. La tubazione aspirante deve essere assolutamente stagna. Le curve di prestazione sono basate su valori di viscosità cinematica = 1 mm<sup>2</sup>/s, densità = 1000kg/m<sup>3</sup> e temperatura acqua 20°C. Tolleranza e curve secondo UNI EN ISO 9906 - Appendice A. The operating characteristics of the label are to be understood for continuous service and with clear water at a max manometric suction height of approximately 1 m. For higher manometric heights and up to a max of approximately 6 m, the characteristics decrease in the various delivery data. The suction piping be absolutely hermetic. The performances curves area based on = 1mm<sup>2</sup>/s, density = 1000 kg/m<sup>3</sup>, water temperature = 20°C. Tolerance and curve according to UNI EN ISO 9906 - Attachment A