

POMPE AUTOADESCANTI PER TRATTRICI

SELF PRIMING PUMPS FOR TRACTORS

POMPES AUTOAMORÇANTES POUR TRACTEURS

GMP
PUMPS

B3XR-A/B A-624A



(1)



(2)



DESCRIZIONE

Pompa autoadescante in bronzo marino con girante aperta, flangiata direttamente al moltiplicatore di giri per collegamento a presa di forza mediante albero cardanico. Adatta per uso marino e circolazione di acqua di mare. Una valvola a clapet posta all'interno del corpo pompa impedisce lo svuotamento della pompa dopo l'arresto.

DESCRIPTION

Marine bronze self-priming pump with open impeller, directly flanged to the gearbox for connection to power take-off by means of a cardan shaft. Suitable for pumping sea water. A clapet valve placed inside the pump body prevents the pump from emptying after stopping.

DESCRIPTION

Pompe auto-amorçante en bronze marin ouverte, directement bridée sur le réducteur pour raccordement à la prise de force par arbre à cardan. Indiquée pour d'eau de mer. Une valve à clapet est placée dans le corps de la pompe pour éviter le vidage après l'arrêt.

CARATTERISTICHE

Altezza massima di aspirazione: 6 m.
Max temperatura del liquido: +70°C
Max passaggio corpi solidi: 24 mm
Portata massima: 75 m³/h
Prevalenza massima: 5 bar
Ø aspirazione: 3"G
Ø mandata: 3"G

FEATURES

Max. suction depth: 6 m.
Max. liquid temperature: +70°C
Max. solids diameter: 24 mm
Max. delivery: 75 m³/h
Max. manometric head: 5 bar
Ø inlet: 3"G
Ø outlet: 3"G

CARACTERISTIQUES

Hauteur d'aspiration maximale: 6 m.
Température Max.: +70°C
Max. diamètre des solides: 24 mm
Débit maximum: 75 m³/h
Hauteur manométrique: 5 bars
Ø aspiration: 3"G
Ø refoulement: 3"G

MATERIALI

Corpo pompa: Bronzo (ASTM B145 C 95800)
Corpo valvola: Bronzo (ASTM B145 C 95800)
Girante: Bronzo (ASTM B145 C 95800)
Flangia tenuta: Bronzo (ASTM B145 C 95800)
Albero pompa: Acciaio Inox AISI 316
Tenuta mecc.: Carbone/NBR/Allumina/AISI 316

MATERIALS

Pump body: Bronze (ASTM B145 C 95800)
Valve body: Bronze (ASTM B145 C 95800)
Impeller: Bronze (ASTM B145 C 95800)
Flange seal: Bronze (ASTM B145 C 95800)
Pump shaft: Stainless Steel AISI 316
Seal: Carbon/NBR/Alumina/AISI 316

MATERIAUX

Corps de pompe: Bronze (ASTM B145 C 95800)
Corps valve: Bronze (ASTM B145 C 95800)
Turbine: Bronze (ASTM B145 C 95800)
Joint de bride: Bronze (ASTM B145 C 95800)
Arbre pompe: Acier Inox AISI 316
Garniture: Charbon/NBR/Alumine/AISI 316

VERSIONI

(1) Ghisa (versione Standard)
(2) Ghisa (versione Semi-Trash)
Tenute meccaniche diverse

SPECIAL

(1) Cast iron (Standard version)
(2) Cast iron (Semi-Trash version)
Different mechanical seals

VERSIONS


(1) Fonte (Standard version)
(2) Fonte (Semi-Trash version)
Différentes garnitures mécaniques

DATI TECNICI MOLTIPLICATORE A-624 A

TECHNICAL DATA GEAR BOX A-624 A

DONNES TECHNIQUES MOLTIPLICATEUR A-624 A

Rapporto Ratio Rapport	Entrata / Input / Entree			Uscita / Output / Sortie		Montaggio Arrangement Montage
	Rpm	Potenza Power Puissance Cv	kW	Coppia Torque Couple N · m	Coppia Torque Couple N · m	
1:6,9	540	35	25,8	/	6,7	3726
Peso Weight Poid	Olio consigliato Recommandet oil Huile recommandée	Materiali / Materials / Matériaux			Ingranaggi Gear Engrenages	Lato entrata Input side Côté entrée
		Scatola Case Boite	Alberi Shaft Arbres	20 Mn Cr 5		
Kg 17	SAE 90 (0,5 l)	G25				X



POMPE AUTOADESCANTI PER TRATTRICI SELF PRIMING FOR TRACTORS POMPES AUTOAMORÇANTES POUR TRACTEURS

B3XR-A/B A-624 A

CURVE DI PRESTAZIONE





Tolleranze e curve secondo UNI EN ISO 9906
Appendice A

PERFORMANCES CURVES

Tolerances and curves according to UNI EN ISO 9906
Attachment A

COURBES DE PERFORMANCES


Tolérance et courbes conformes aux normes UNI EN ISO 9906
Annexe A

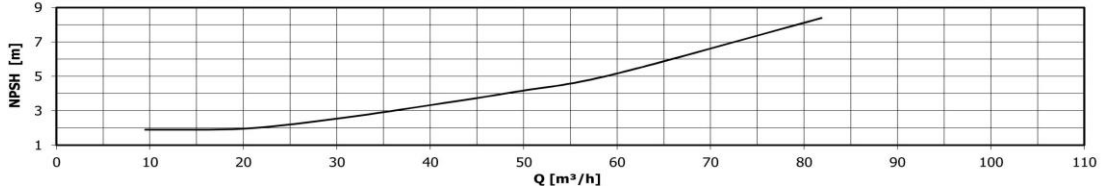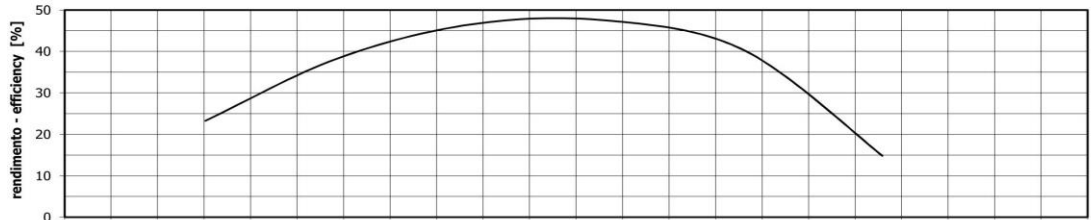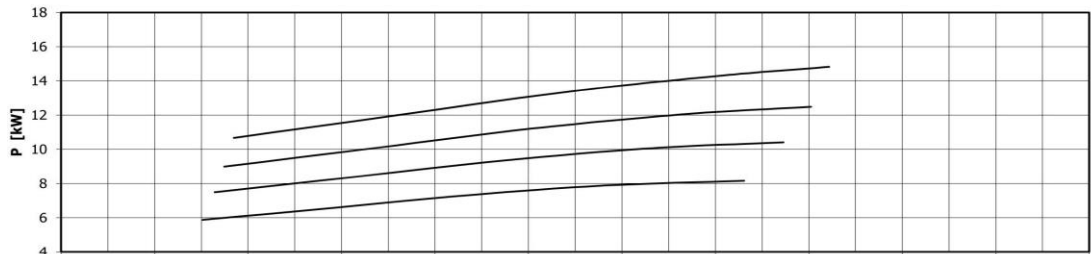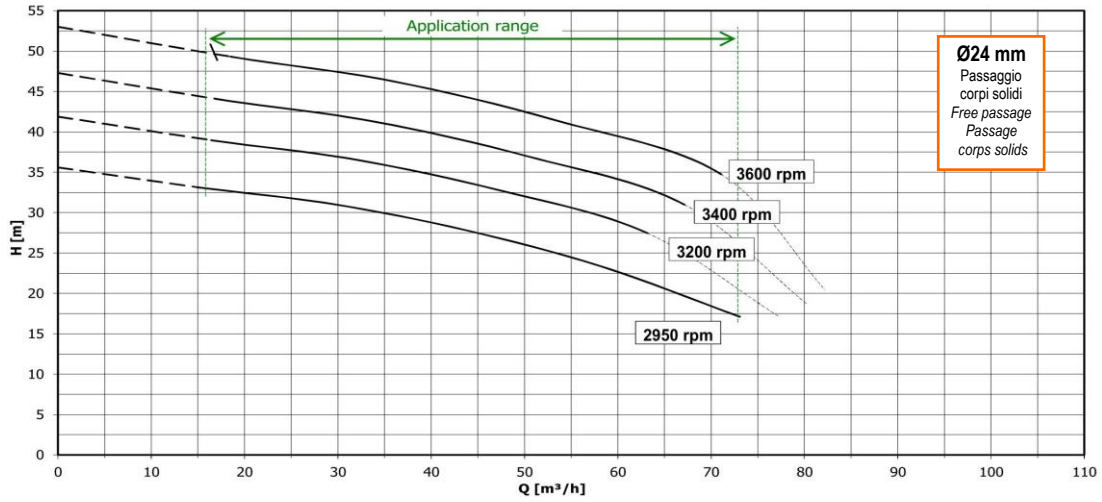

DIMENSIONI

DIMENSIONS

DIMENSIONS

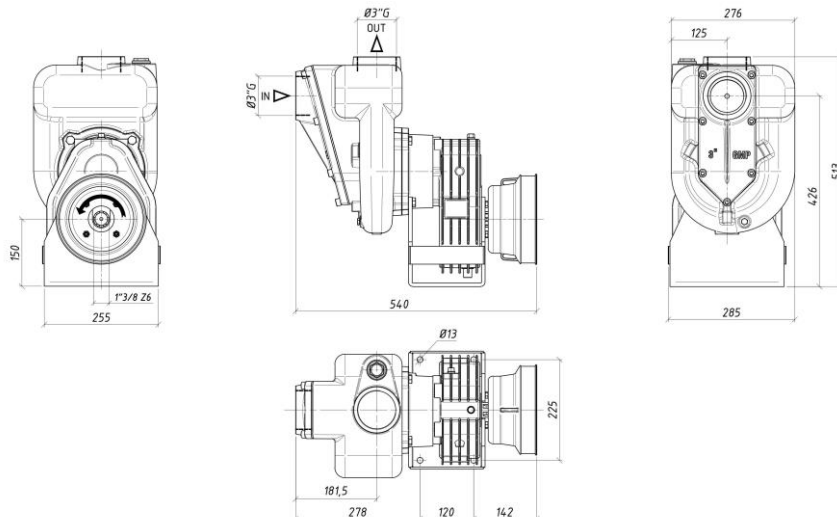

PESO
Weight
Kg
61